




Intelligent
智能



Energy saving
节能

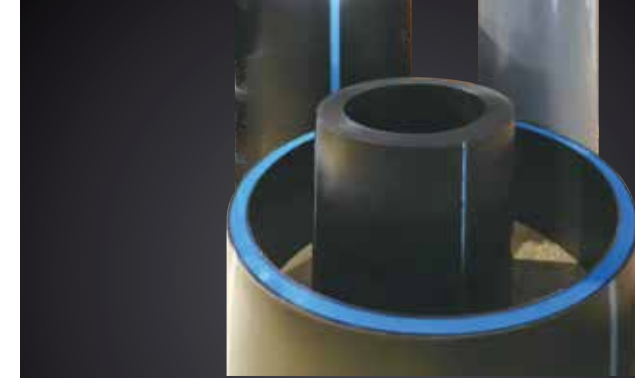

High speed
高速



High efficiency
高效



JWELL-MFH 系列 HDPE 聚乙烯多层共挤给排水管高速节能挤出生产线

JWELL-MFH Series HDPE Polyethylene High-speed and Energy-saving Multi-layer Co-extrusion Water Supply and Drainage Pipe Extrusion Line

性能特点:

该生产线可实现多台挤出机统一同步调速，可以选配多台米重控制系统，由 PLC 集中控制，实现每一台主机的精准挤出。按不同层数和每层厚度比例设计多层螺旋式模具，模腔流道分布合理，确保管材的分层厚度均匀。

Performance features:

This production line can realize unified and synchronous speed adjustment of multiple extruders. It can be equipped with multiple meter weight control systems and is centrally controlled by PLC to achieve precise extrusion of each extruder.

The multi-layer spiral mold is designed according to the number of layers and the thickness ratio of each layer. The mold cavity flow channels are reasonably distributed to ensure uniform thickness of the pipe.

主要技术参数 Main technical parameter

生产线型号	主机型号	生产范围	最大牵引速度	最大生产能力
Line Type	Extruder Type	Pipe Range(mm)	Max. Speed (m/min)	Max.Capacity(kg/h)
MFH-F63	MFH-60/ MFH-45	16-63	40	250-360
	MFH-60/ MFH-45 x2 pcs	16-63	40	250-360
MFH-F110	MFH-60/ MFH-45	20-110	30	300-440
	MFH-60/ MFH-45 x2 pcs	20-110	30	300-440
MFH-F160	MFH-60/ MFH-45	50-160	15	360-520
	MFH-60/ MFH-45 x2 pcs	50-160	15	360-520
MFH-F250	MFH-75/ MFH-45	75-250	8	450-640
	MFH-75/ MFH-45 x2 pcs	75-250	8	450-640

主要技术参数 Main technical parameter

生产线型号	主机型号	生产范围	最大牵引速度	最大生产能力
Line Type	Extruder Type	Pipe Range(mm)	Max. Speed (m/min)	Max.Capacity(kg/h)
MFH-F315	MFH-75/ MFH-45	110-315	6	520-740
	MFH-75/ MFH-45 x2 pcs	110-315	6	520-740
MFH-F450	MFH-75/ MFH-50	160-450	2.4	620-880
	MFH-75/ MFH-45 x2 pcs	160-450	2.4	620-880
MFH-F500	MFH-75/ MFH-50	160-500	2.4	700-1000
	MFH-75/ MFH-45 x2 pcs	160-500	2.4	700-1000
MFH-F630	MFH-90/ MFH-50	315-600	1.2	840-1200
	MFH-90/ MFH-50 x2 pcs	315-600	1.2	840-1200
MFH-F800	MFH-90/ MFH-60	400-800	1	980-1400
	MFH-90/ MFH-50 x2 pcs	400-800	1	980-1400
MFH-F1000	MFH-90/ MFH-75	500-1000	1	980-1400
	MFH-90/ MFH-60 x2 pcs	500-1000	1	980-1400
MFH-F1200	MFH-120/ MFH-60	630-1200	0.8	1100-1600
	MFH-120/ MFH-60 x2 pcs	630-1200	0.8	1100-1600
MFH-F1600	MFH-120/ MFH-75	1000-1600	0.6	1250-1800
	MFH-120/ MFH-60 x2 pcs	1000-1600	0.6	1250-1800
MFH-F2000	MFH-120/ MFH-90	1200-2000	0.5	1300-2000
	MFH-120/ MFH-75 x2 pcs	1200-2000	0.5	1300-2000
MFH-F2700	MFH-120/MFH-90 x2 pcs	2200-2700	0.1	2400-3000

备注：以上规格参数如有变更，恕不另行通知。Note:The specifications are subject to change without prior notice.

